

Order Process Description


This QuickGuide describes the workflows for orders and other processes.

Table of Contents

- 1 [Create Contact – Task 0301](#)
- 2 [Create Domain – Task 0101](#)
- 3 [Update Domain – Task 0102](#)
- 4 [Transfer Domain – Task 0104 - Transfer Start](#)
- 5 [OwnerChange – Task 0104010](#)
- 6 [Domain Cancellation Create - Task 0103101](#)
- 7 [Domain Transfer Out](#)
 - 7.1 [With registrar involvement \(gTLDs, internal transfers\)](#)
 - 7.2 [Without registrar involvement \(e.g. .EU, .AT\)](#)
- 8 [Update Contact – Task 0302](#)
- 9 [Cancellation Delete](#)

Create Contact – Task 0301

For OwnerC, AdminC, TechC, ZoneC

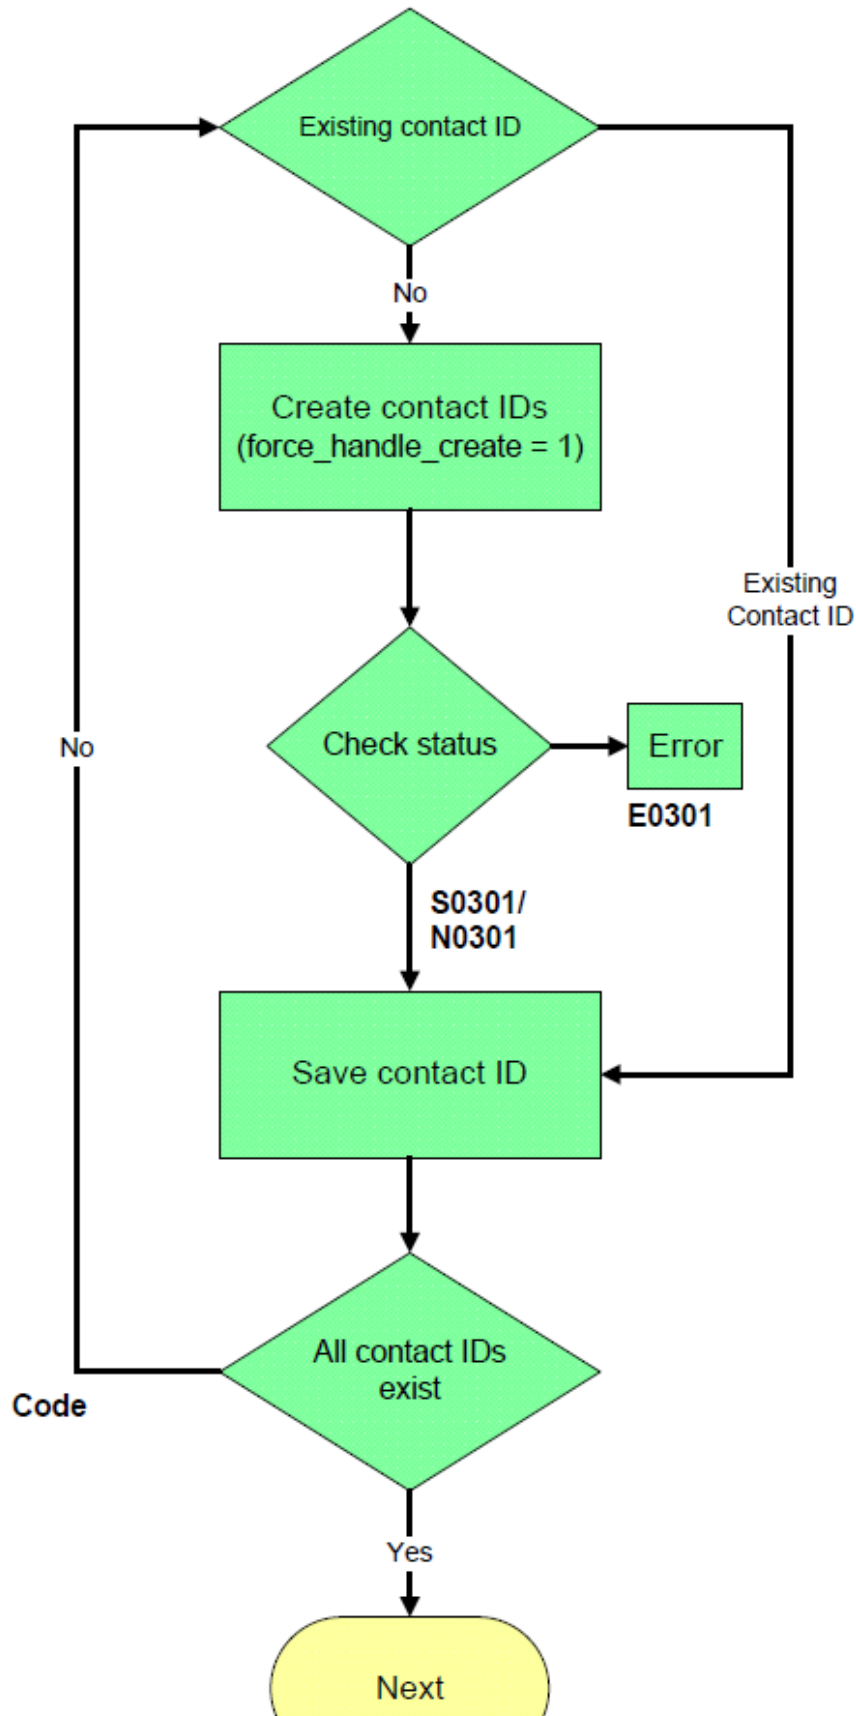


The provider's standard contacts can be used for TechC and ZoneC. The OwnerC is almost always used as BillingC. However, this is not possible for some TLDs.

Xpath:
/resonse/result/
status/object/value




Create Domain – Task 0101

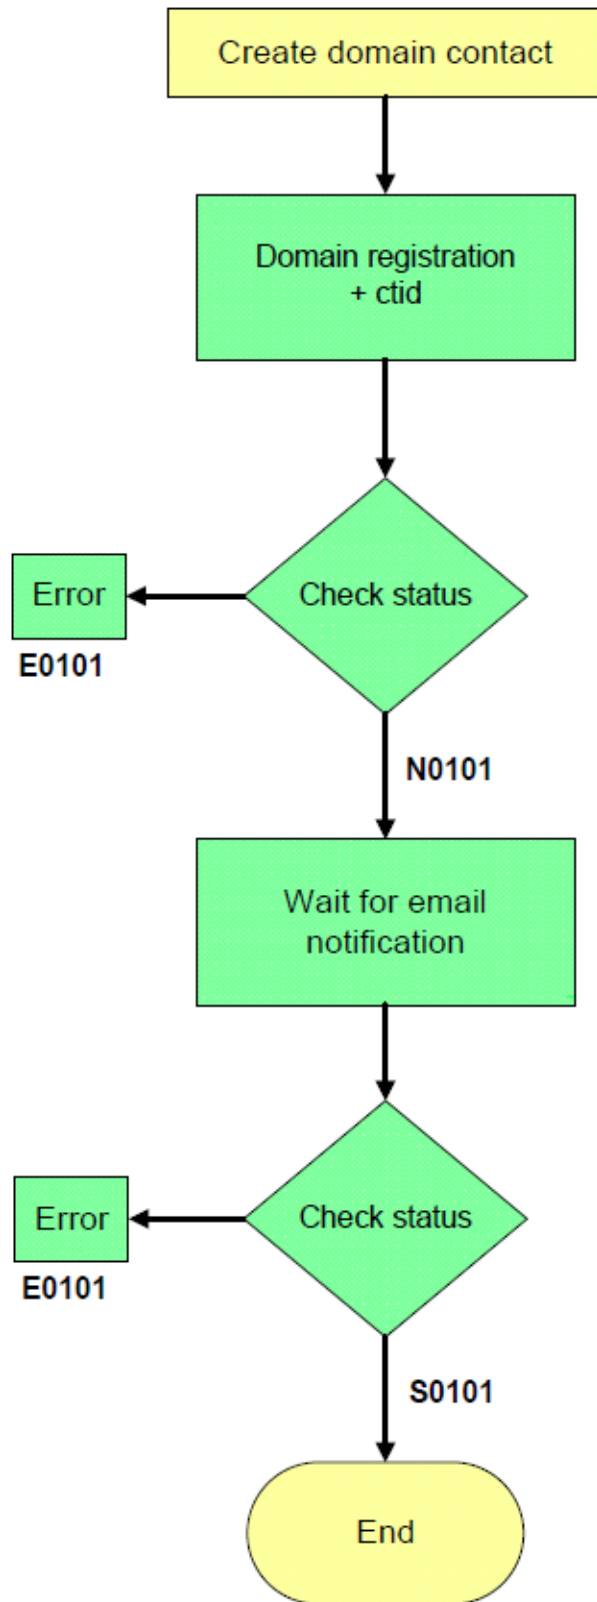

See page 1

You can ignore the responses for the TLD reference creations. They serve only for information purposes (Task: 03xx with identical Ctid)


Update Domain – Task 0102

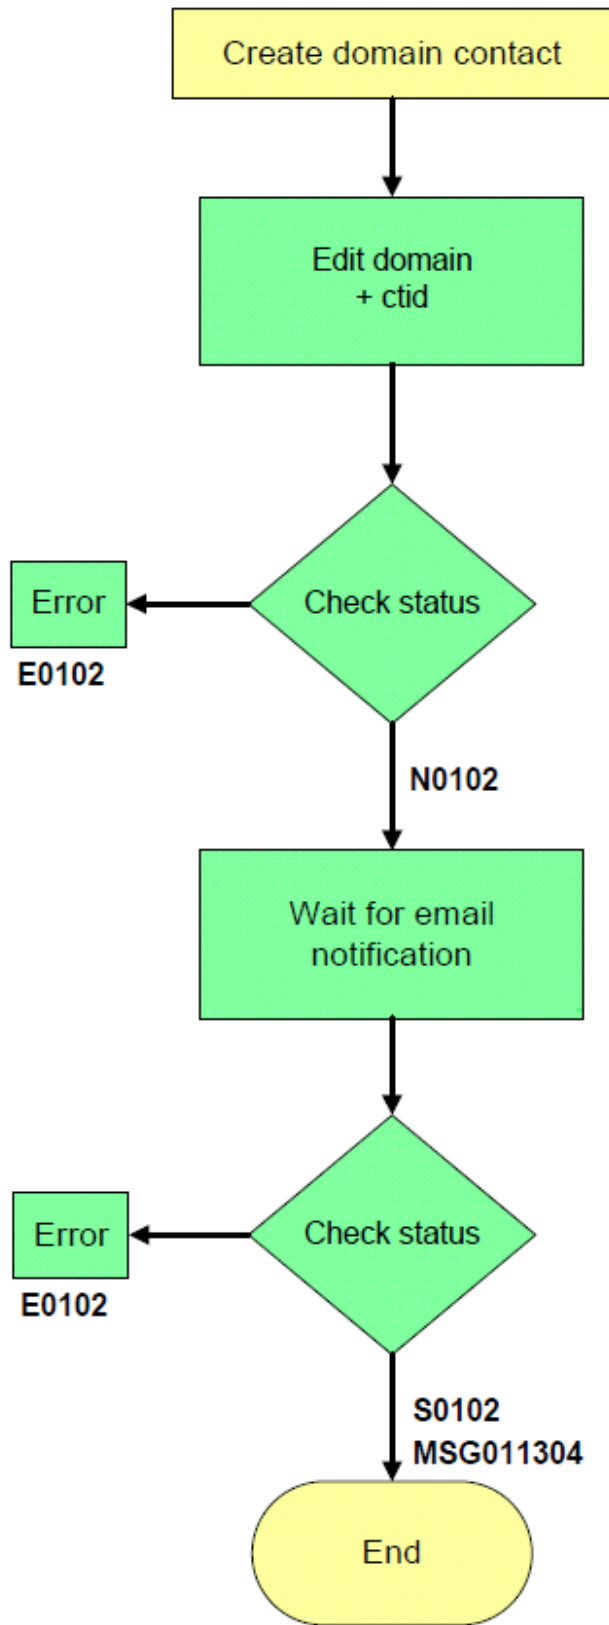

See page 1

You can ignore the responses for the TLD reference creations. They serve only for information purposes (Task: 03xx with identical ctid)

Transfer Domain – Task 0104 - Transfer Start

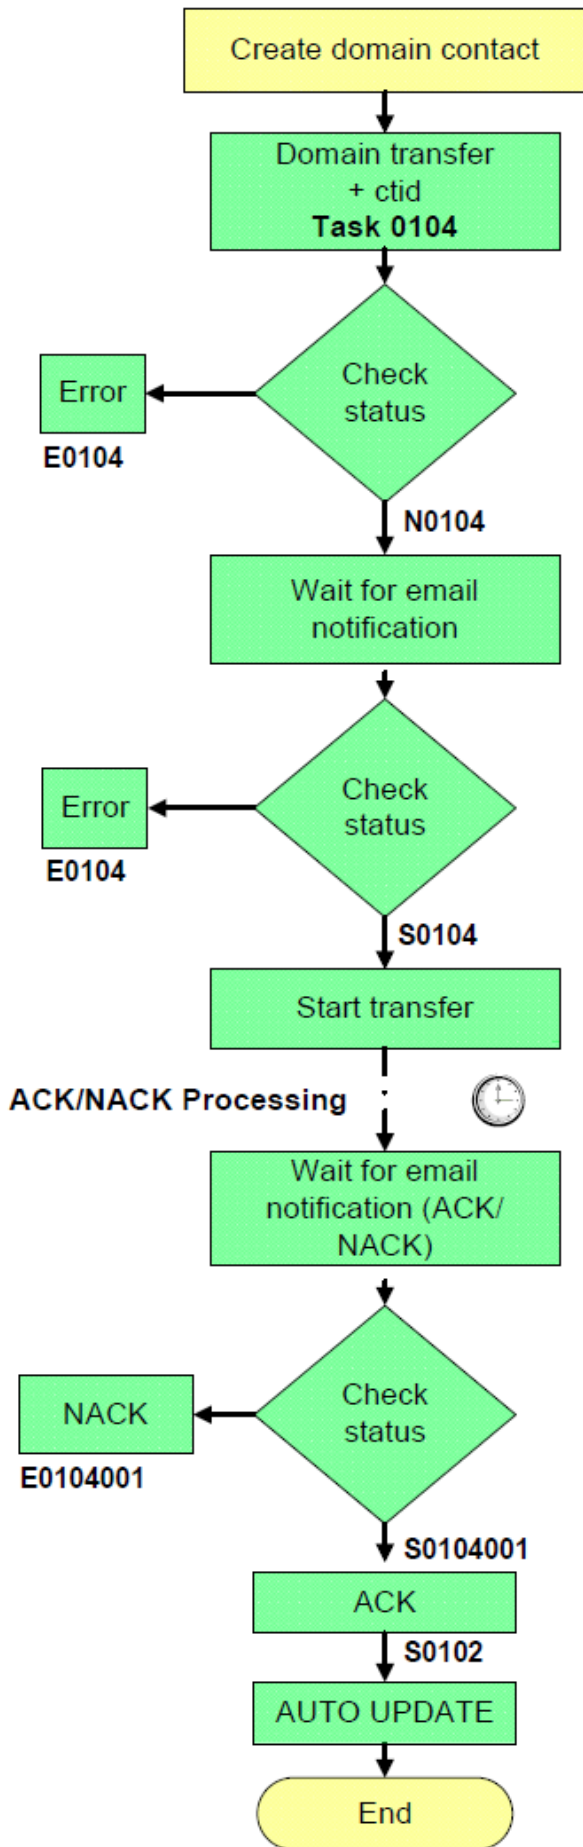


See page 1

You can ignore the responses for the TLD reference creations. They serve only for information purposes (Task: 03xx with identical ctid).

You can ignore IRTP emails. They serve only for information purposes (Task: 03xx with identical ctid).

If an AUTOUPDATE was carried out after the transfer, the tag „autoupdate: true“ is in the system block. The same ctid is returned for the keyword “transaction” as with the transfer start and ACK.

OwnerChange – Task 0104010

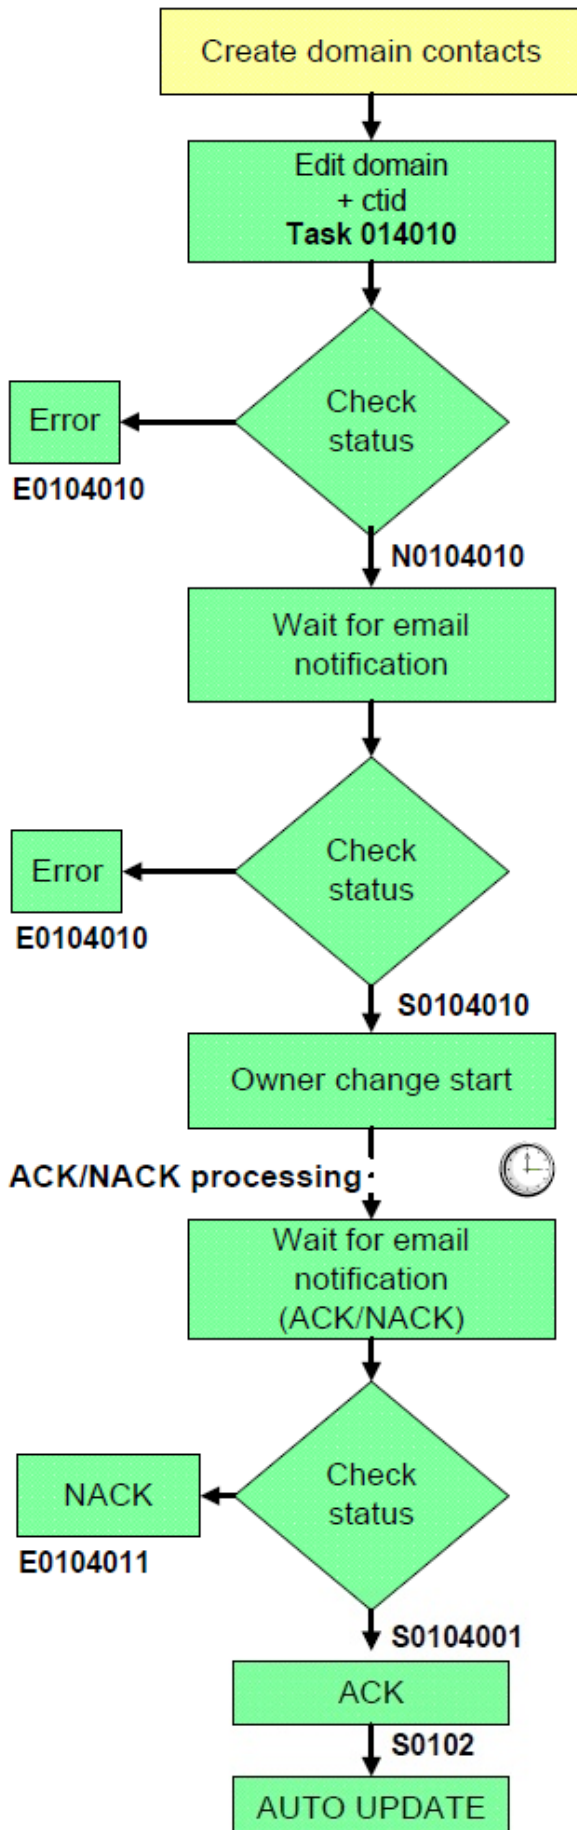


See page 1

Owner change is only possible for some TLDs.


You can ignore the responses for TLD reference creation. They serve only for information purposes (Task: 03xx with identical ctid).

If an AUTOUPDATE was carried out after the transfer, the tag „autoupdate: true“ is in the system block.
The same ctid is returned

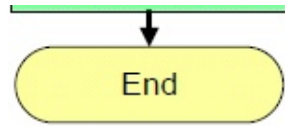

- | The same cid is returned
- | for the keyword
- | "transaction" as with the
- | transfer start and ACK.

Domain Cancelation Create - Task 0103101

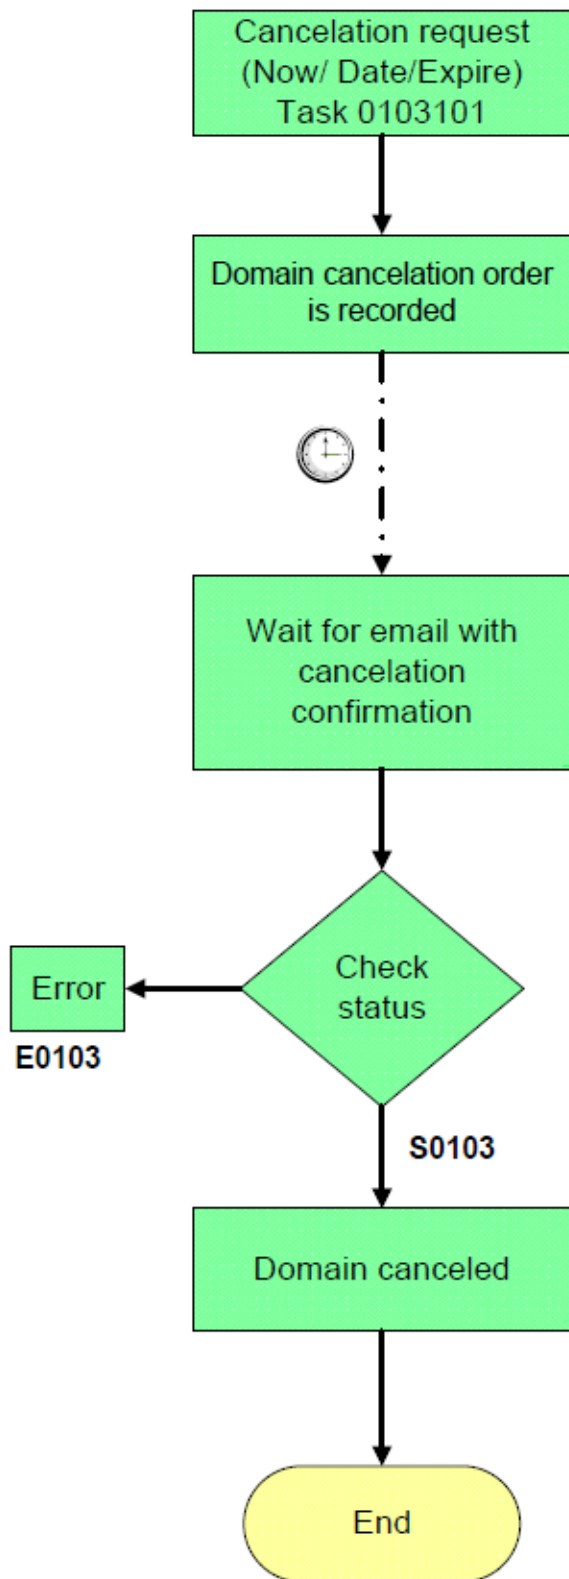


Some TLDs can only be canceled at expiry. The system automatically changes the selected point of time if it is different. Please be aware of the notice periods which exist for some TLDs.

If the selected cancellation time is reached and the cancelation still exists.


Domain Transfer Out

With registrar involvement (gTLDs, internal transfers)

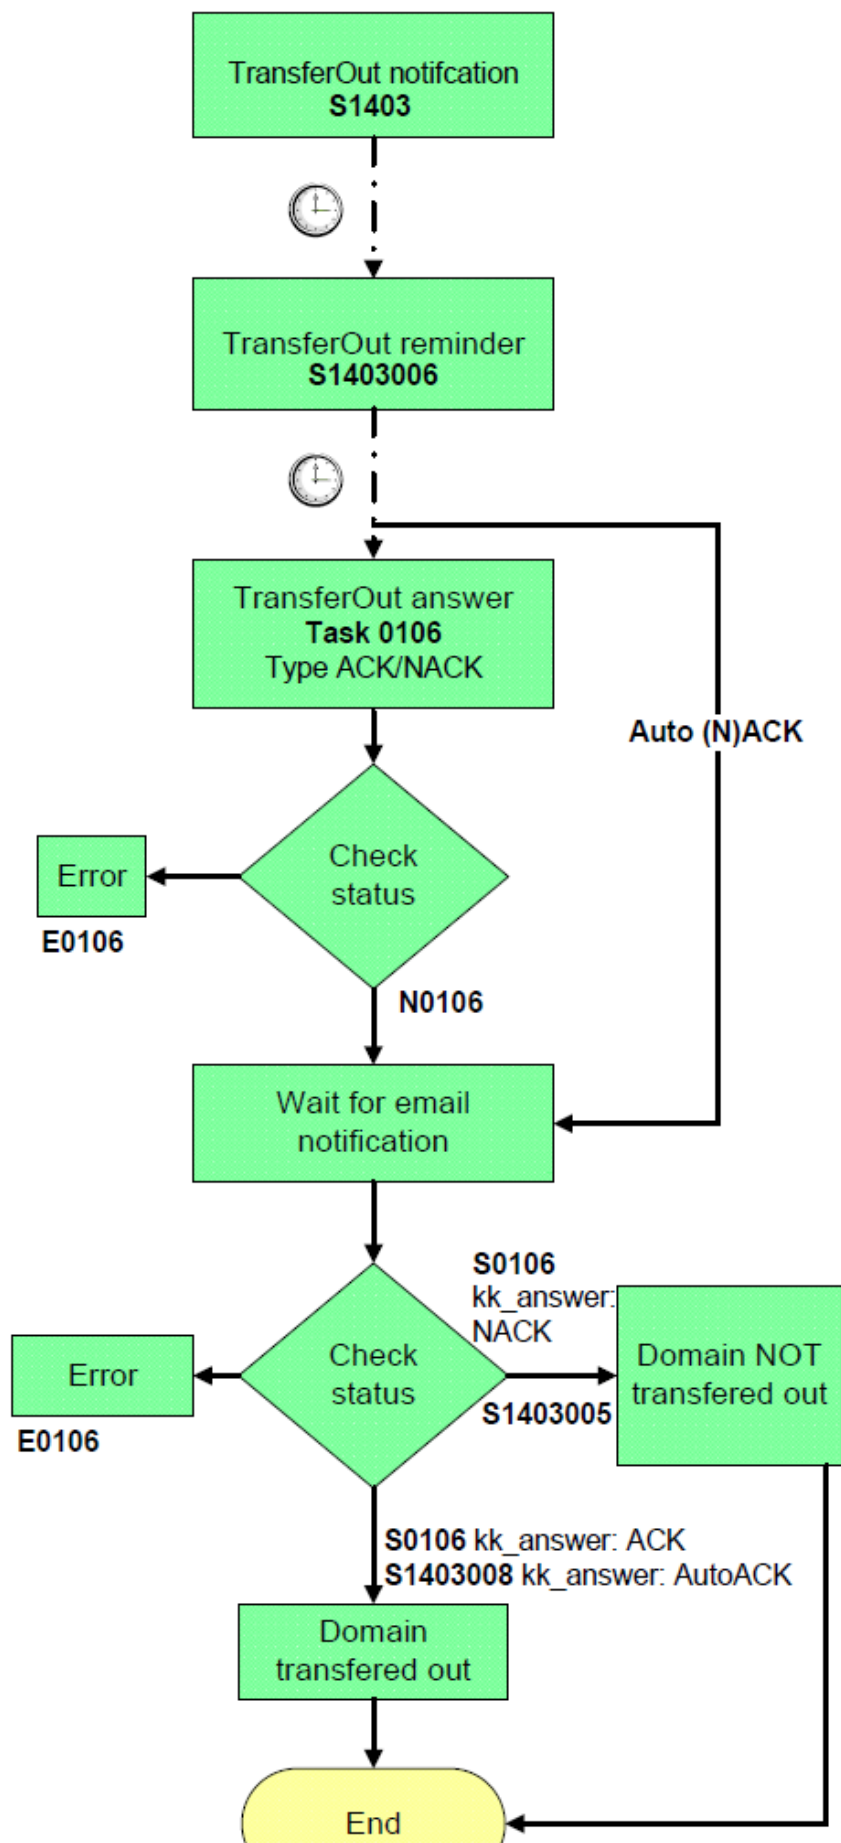


There are also PreACKS in AutoDNS. A mandatory PreACK can also be configured.

An AutoACK (only for gTLDs) or an AutoNACK is sent at the end of a transfer if there is no reaction.




:

Without registrar involvement (e.g. .EU, .AT)

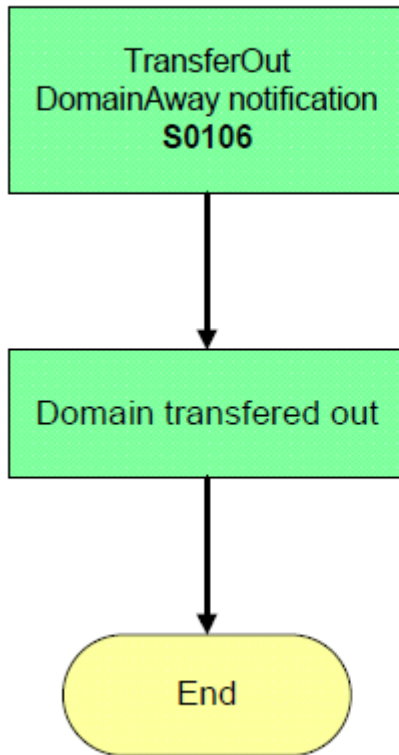

Update Contact – Task 0302

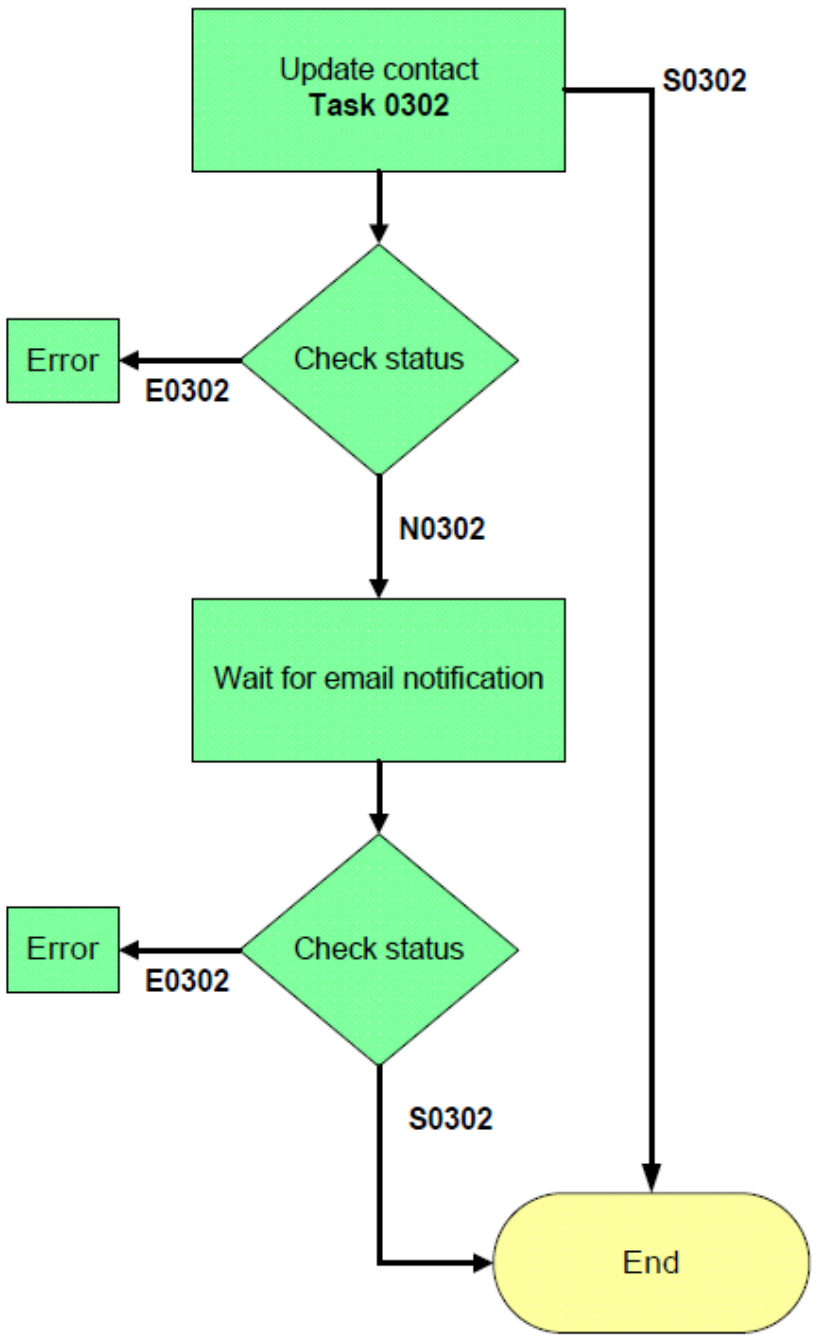

Contact changes are always carried out in the database immediately. However it can occur that some TLD-references are not changed.

Cancelation Delete

